





Thermic Fluid Pumps

FPE-TF/FPE-TC series

AS PER ISO 2858 / DIN 24256

Capacity up to : 250 M³/Hr.
 Temp. up to : 350° C
 TDH up to : 95 MLC
 Working Pr. up to : 20 Bars
 Delivery Size up to : 100 mm

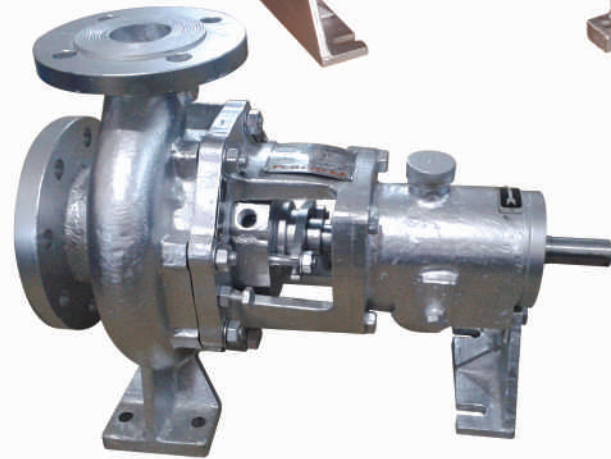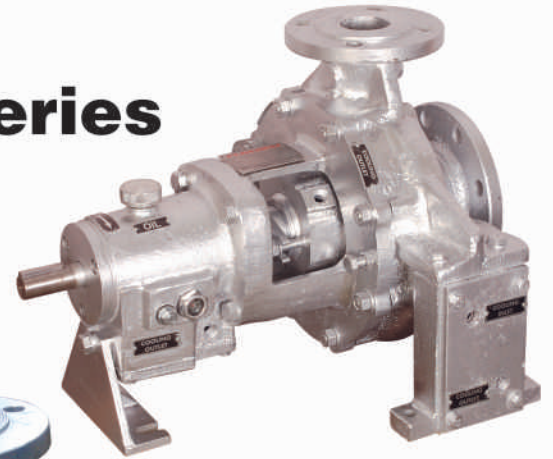

Industries Covered

Pharmaceuticals & Chemical	Oil Extraction Plants
Pulp & Paper Industries	Waste Oil Refining Plants
Starch Industries	Air-Conditioning / Heating Plants
Effluent Treatment Plants	Cooling Tower Water Circulation
Dyes & Intermediates	Solvent Transfer
RO & DM Water Plants	Thermic Fluid Circulation

Material of Construction :

Pumps are manufactured in variety of materials such as

- Stainless Steel as per ASTM A 351/743 Gr. CF8, CF8M,
- Carbon Steel / WCB.

Selection Chart 2900 RPM

